



FULL ICE CUBE: High density full ice cube, crystal-clear and pure. Suitable for the long-lasting cooling of any drink, without water it down, for any use.

HORIZONTAL EVAPORATOR, SPRAY SYSTEM: The horizontal evaporator consists in conic copper cups faces down. The pump raises the water under pressure, which is sprayed to the evaporators thaks to the sprayers. The ice cubes are formed inside each cup and thanks to the hot gas they will fall down into the tank.

BACK COUNTER: Medium and large machines to be fitted in the work area, on the back of the bars, elegant to be shown. The big production is a real advantage when the need of ice is necessary in a short period, p.e. in big bars, discos, music clubs, big restaurants and hotels. The machines have a maximum width of 90 cm and thanks to the maximum height of 120 cm and the good top panel (74x60 cm or 84x74 cm), they can be used as a desk for work or to place light things, with no waste of space. All models are for "tropical use": they can produce ice even at a room temperature of 43°C and water temperature of 32°C.






18 gr FULL ICE CUBE

Aristarco S.p.A. - Via del Lavoro 30, 31033 Castelfranco Veneto (Treviso) ITALY Tel. (+39) 0423-425611 - Fax. (+39) 0423-425690 - www.aristarco.it



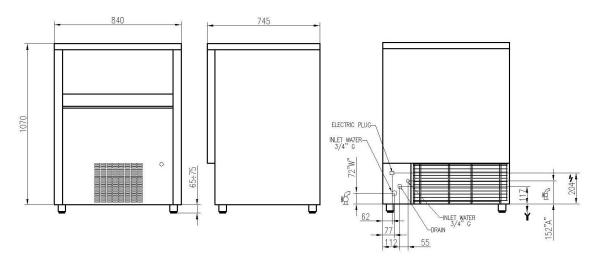

	CP 130.75	CP 165.75
Control system	M	M
Cooling system	A/W	A/W
Production in 24 h	130 kg Up to 7222 cubes	165 kg Up to 9167 cubes
Production per cycle	108 ice cubes	108 ice cubes
Storage capacity	75 kg Approx 4167 cubes	75 kg Approx 4167cubes

Voltage Standard	230 V~ 50Hz	230 V~ 50Hz
Power consumption	1250 W	1900 W
Type of refrigerant	R 452 A	R 452 A
Dimensions (WxDxH)	840x745x1070 mm	840x745x1070 mm
Feet	40-50 mm	40-50 mm
Net Weight	105 kg	107 kg

Packing dimensions (WxDxH)	920x810x1240 mm	920x810x1240 mm
Gross weight	119,5 kg	121,5 kg

M = Mechanical control

W = Water cooled

A = Air cooled

70% 65% 60% 38°C 55% 50% 32°C 70% 55% 55% 80% 70% 60% 60% 25°C 90% 100% 100% 80% 70% 65% 15°C 10°C 105% 100% 90% 80% 70% 43°C

AMBIENT-TEMPERATURE

ACCESSORIES:



Drain pump
- External drain pump for ice
ma- ker. Flow max. 8 l/min. Max
fitting height 5 m.



Powder Dosing unit
- Powder Dosing unit to prevent scale built-up. Each unit include 2 bags. Filter capacity 50.000 I.



Cytric acid for food service to removecalc.



WATER-TEMPERATURE



